


## **Technical Data Sheet**

## Magnetic Transfer Tapes


Type :

DIHDSV29

HiCo 2750 double silver

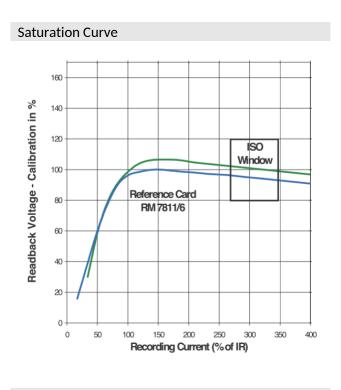


## Film - Coating Composite



Base film Protection layer Magnetic layer Silver layer Adhesive

## Transfer Process

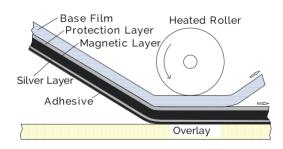

General Characteristics	
Base film material	Polyester
Magnetic layer material	Oxide
Color	Silver
Thickness Characteristics [ µm ]	
Base film	19
Total thickness	00
l otal thickness	33
Magnetic Characteristics	
Coercivity H <sub>c</sub>	215 ÷ 255 kA/m
Retentivity M <sub>r</sub>	106 ± 10% mT
Squareness	≥ 0,8
Switching field SFD	≤ 0,4
Signal Amplitude Characteristics	
Signal amplitude U <sub>A1</sub>	100 ±20 % U <sub>R</sub>
Signal amplitude U <sub>A2</sub>	≥ 80 % U <sub>R</sub>
Wear Resistance Characteristics	
According to ISO/IEC 7811-6 / 10373-1	
Average signal amplitude U <sub>A after</sub>	≥ 70% U <sub>A before</sub>
Chemical Resistance Characteristics	
According to ISO/IEC 7811-6 / 10373-1	
Average signal amplitude U <sub>A after</sub>	≥ 90% U <sub>A before</sub>
Individual signal amplitude U <sub>i after</sub>	≥ 90% U <sub>A after</sub>
Storage Conditions	
For tape with adhesive:	
The allowed storage period for the reel is 2 years from the date of	
certificate under the following conditions :	
Temperature :	10°C - 28°C

The information given in the technical datasheet is based on our current knowledge. This information merely describes the product's properties but do not guarantee them from a legal point of view. We recommend to conduct tests before industrial use in order to check whether the product is suitable for the expected application.

Humidity :

20%-60% RH

Additional pressure on the windings shall be avoided